




HOLSET FRAME SIZES

	HX20	HX25-27	HE200	HX30	HE300	HX35	HX40	HE400	HX50	HX55	HE500	HX60	HX82-83
For Engine Capacity (litres per turbo)	Up to 5	Up to 5	Up to 7	Up to 7	Up to 10	Up to 10	Up to 12	Up to 15	Up to 15	Up to 16	Up to 16	Up to 19	Up to 25
Output Range (kW)	14-60	20-120	75-120	75-120	90-240	90-240	150-280	150-280	220-370	220-420	220-420	240-450	375-840
Airflow (kg/s)	0.2	0.23	0.33	0.33	0.46	0.46	0.53	0.54	0.75	0.75	0.75	0.95	1.5
Dimensions:													
Length (mm)	176	254	254	222	250	224	231	319	249	259	278	280	332
Width (mm)	160	226	226	217	240	250	250	319	275	275	278	285	318
Height (mm)	130	148	148	154	220	169	169	230	225	225	267	237	300
Smallest Mass (kg)	2.8	4	4	8	9	9	11	11	16	18	18	18	35
Largest Mass (kg)	2.8	5	5	10	17	11	14	23	19	21	33	22	55
Options:													
Holset VGT™					•		•	•		•	•		
Wastegate	•	•	•	•	•	•	•	•	•	•	•	•	•
Ti Impeller					•	•	•	•		•	•	•	•
Machined From Solid Impeller			•	•	•	•	•	•	•	•	•	•	•
Semi-Solid Moulded Impeller								•			•		

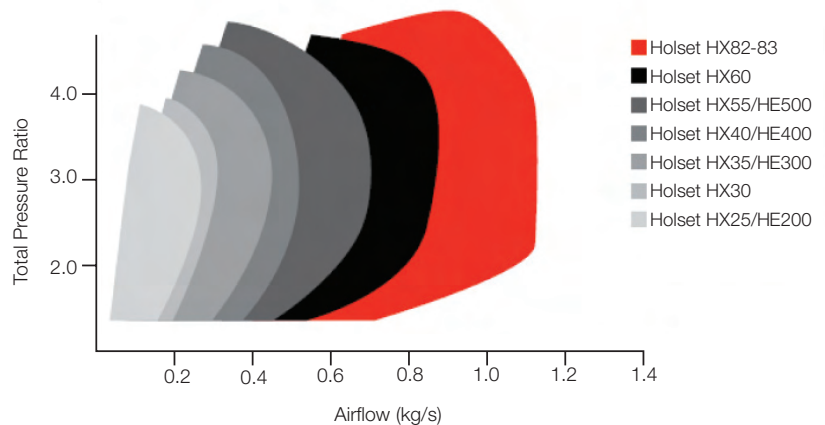

Cummins Turbo Technologies
 8550 Palmetto Commerce Parkway
 Ladson, Charleston, South Carolina 29420
 USA
 Tel +1 843 695 2181
 Fax +1 843 695 2190
 turbo.sales@cummins.com

Cummins Turbo Technologies
 Rua Jati, 310
 Guarulhos - SP
 07180 - 900 Brazil
 Tel +55 11 2186 4791/4790
 Fax +55 11 2186 4181
 holset.brasil@cummins.com

Wuxi Cummins Turbo Technologies
 28 Xinxi Road
 Wuxi National High and New Technology Development Zone
 Wuxi, Jiangsu 214028 China
 Tel +86 510 85200800
 Fax +86 510 85200899
 turbo.mail@cummins.com